
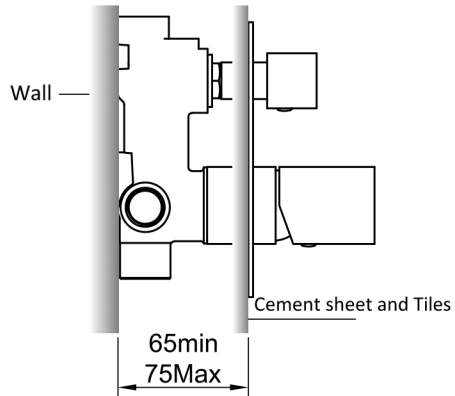


# Installation Guide

## Shower Diverter Mixer- FWCU2037

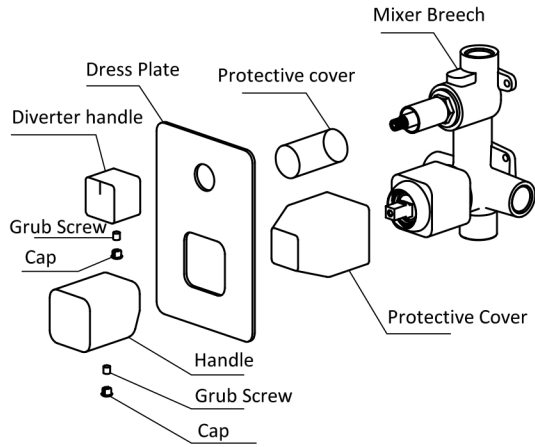

Total adjustment range measured from wall to finished surface is 65mm to 75mm.

**1** Mount the diverter mixer in place and ensure both holes center are on same line vertically.

**Note:** Do not take off protective cover till final fit-off.

**4** Remove the protective cover, fit the dress plate onto the mixer body gently. Fit the handle onto cartridge spindle and fasten grub screw, then put cap on.

**2** Connect hot and cold water supplies as shown.

**Test and check for leaks**

**3** Cut a 35mm diameter hole and a 75mm diameter hole in cement sheet and tiles, 68mm apart as shown.

**5** Fit the diverter handle onto spindle, ensuring the line points vertically upward. Fasten grub screw firmly by Allen key, put the screw cap on. Test and check if the diverter works well.

**6** Finished Work

### Notes

1. Pressure rating: 150-500kpa. If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
2. Temperature rating: 1-75°C. If the water temperature exceeds 55°C, an approved tempering valve must be fitted.
3. Flush out all pipes prior to installation.
4. Installation should comply with Australia standard AS/NZS3500 or relevant local authority requirements.

### Maintenance and Care

1. All products should be cleaned with mild detergent or soapy water by using a soft cloth or dampened sponge.
2. Dry with a soft cloth after each use and clean regularly.
3. Do not use any chemical or abrasive cleaners.