


Installation Guide

Basin Mixer- FWCU8228

WATERWARE

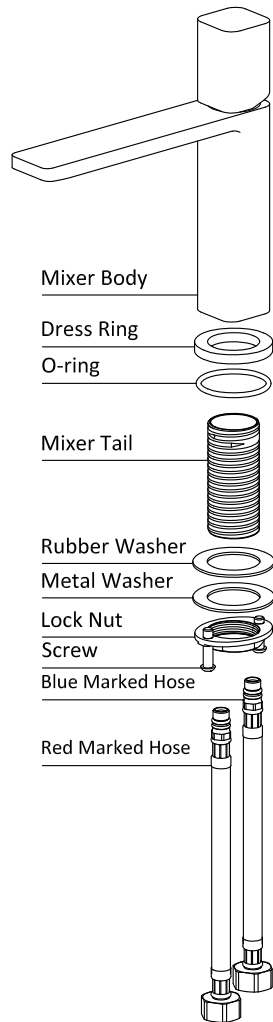

1

Cut a 35mm hole in diameter and ensure there are 60mm circle space for mounting.

2

Underneath the Mounting hole, screw down the Lock nut till the end of Mixer tail, feed the Metal washer then Rubber washer from the upside onto the Mixer Tail.

Feed hoses through the mixer tail and then both mixer tail & hoses through the hole.

Rubber Washer
Metal Washer
Lock Nut

3

Feed the dress ring onto the mixer tail, screw the hoses into the mixer body per below instruction.

Screw the mixer tail into the mixer body, don't scratch the dress ring while screwing.

Place the mixer into position.

Hot water-Red marked hose
Cold water-Blue marked hose

4

Underneath the mounting hole, firmly fasten the locknut and then tighten the screws.

5

Connect hoses to the water supply.

Test and check for leaks.

Red marked hose
Blue marked hose
Hot Supply
Cold Supply

6

Finished work

Notes

1. Pressure rating: 150-500kpa. If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
2. Temperature rating: 1-75°C. If the water temperature exceeds 55°C, an approved tempering valve must be fitted.
3. Flush out all pipes prior to installation.
4. Installation should comply with Australia standard AS/NZS3500 or relevant local authority requirements.

Maintenance and Care

1. All products should be cleaned with mild detergent or soapy water by using a soft cloth or dampened sponge.
2. Dry with a soft cloth after each use and clean regularly.
3. Do not use any chemical or abrasive cleaners.