#### Caleffi 327 Series Ball/Check Valve 25f x 25f





### **Technical Specification**

Body: brass EN 12164 CW614N, chrome plated

Check valve spring: stainless steel

Control Seal: EPDM Handle: aluminium Control Stem Seal: PTFE


Medium: water, glycol solutions

Max % of Glycol: 30% Max Pressure: 16 bar

Min Pressure to open check: 0.02 bar

Working temp: 5-110°C



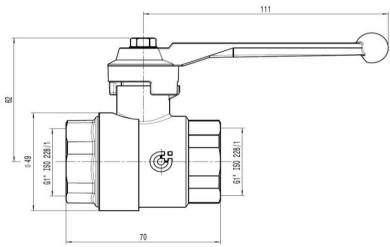

## **Application**

The Caleffi 327 Series Ball/Check Valve 25f x 25f is used in plumbing systems to control functionaliity of the system and is installed mostly in plant rooms.

# Warranty

### Download the latest warranty statement

#### Features

The ball valves with built-in check valve BALLSTOP combine two devices in a single body: a ball shut-off valve and a check valve housed inside the ball itself. This dual function allows for quicker installation and a more compact device, which means less space required on the pipe.

