BVS327800

Caleffi 327 Series Ball/Check Valve 40f x 40f





Technical Specification

Body: brass EN 12165 CW617N, chrome plated

Check valve spring: stainless steel

Control Seal: EPDM Handle: aluminium Control Stem Seal: PTFE


Medium: water, glycol solutions

Max % of Glycol: 30% Max Pressure: 16 bar

Min Pressure to open check: 0.02 bar

Working temp: 5-110°C



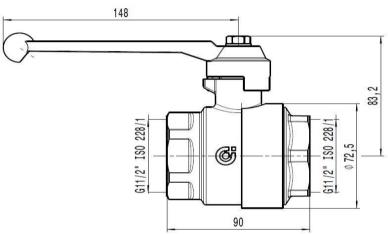

Application

The Caleffi 327 Series Ball/Check Valve 40f x 40f is used in plumbing systems to control functionaliity of the system and is installed mostly in plant rooms.

Warranty

Download the latest warranty statement

Features

The ball valves with built-in check valve BALLSTOP combine two devices in a single body: a ball shut-off valve and a check valve housed inside the ball itself. This dual function allows for quicker installation and a more compact device, which means less space required on the pipe.

