


GBV24L

Vaillant EcoTec Boiler 24kW LPG



Technical Specification

- CH heat output 80°/60° (kW): 5.2- 24.4
- Max. CH temperature (°C): 85
- Max. efficiency (%): 112
- LPG consumption (kg/h): 1.7
- Electrical connection (V/Hz): 230/50
- Electrical consumption min/max (watts): 35/65
- Flue Ø (mm): 60/100
- Expansion vessel capacity (L): 10
- Min. installation clearance top (mm): 165
- Min. installation clearance side (mm): 5
- Min. installation clearance bottom (mm): 180
- Dimensions (mm): 440w x 720h x 338d
- Mounting weight (kg): 37

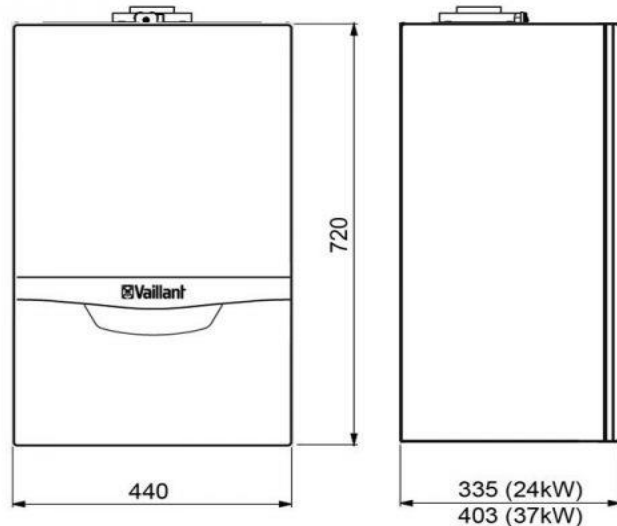

Application

The Vaillant EcoTec Boiler 24kW LPG is used in heating systems to generate mechanical hot water and is installed mostly in plant rooms.

Warranty

[Download the latest warranty statement](#)

Features

Condensing boilers use advanced combustion technology which scavenges energy found in the flue gas that would otherwise be lost to the atmosphere resulting in running efficiencies up to 112%. The Vaillant ecoTEC condensing boilers from Germany are a premium quality, high performance choice packed with features which result in the most reliable and lowest running cost boiler available today.

- Exceptional German build quality
- Whisper quiet
- Weather compensating capability
- High efficiency pump and fan
- Wide operating range
- Extremely low stand-by losses (<2W)

Made in Germany