


HPVMPS

Vaillant AroTherm Buffer Tank



Technical Specification

- Net Weight: 24.2kg
- Nominal capacity: 45L
- Max pressure: 3 bar
- Min Pressure: 0.3 bar
- Max temperature: 85°C
- Min temperature: 5°C
- Installation options: Wall or floor
- Dimensions: 939mm x 365mm diameter
- Connections: 1&1/4" Female

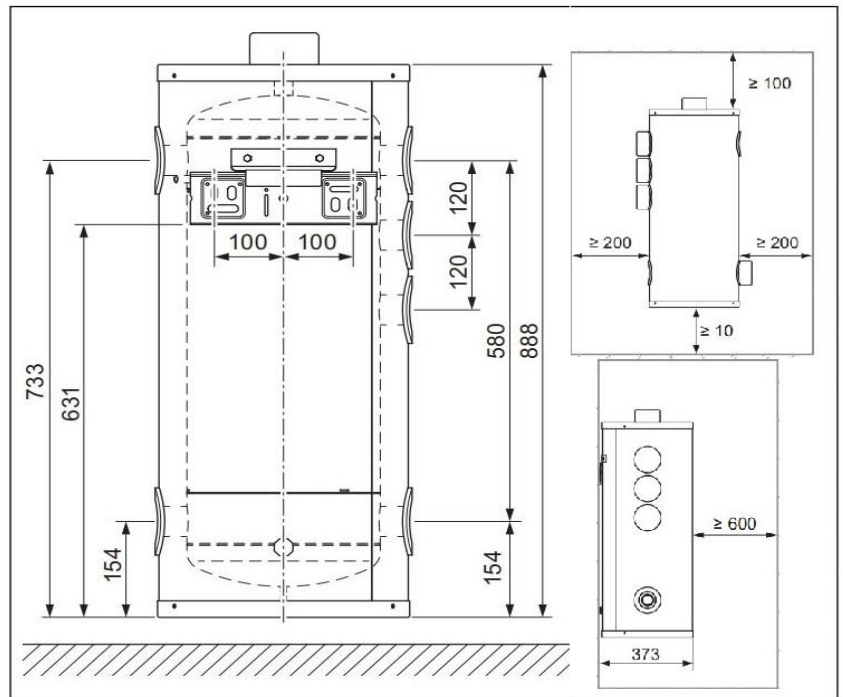

Application

The Vaillant AroTherm Buffer Tank is used in heating & cooling systems to control functionality of the system and is installed mostly in plant rooms.

Warranty

[Download the latest warranty statement](#)

Features

45 litre compact wallhung or floor mounted buffer cylinder for hydraulic isolation. Suitable for heating and cooling applications.

Convenient configuration for cascading dual heat pumps, hybrid heat pump & gas boiler systems or hydraulic separation between heat pump and full zone control underfloor systems.

Constructed with low and high temperature outputs

Made in Germany