

HS2319

RBM 25mm Magnetic Filter



Technical Specification

25mm, magnetic filter, 500ml dosing pot, 3/8 airvent port

Diverter body: Polyamide PA66 + 30% FV

Cartridge body: Polyamide PA66 + 30% FV

Locking ring: Polyamide PA66 + 30% FV Filter cap: Polyamide PA66 + 30% FV

Filtering cartridge: Stainless steel AISI 304

Hydraulic seals: EPDM PEROX

Magnet: Neodymium REN35 B = 11.000 Gauss

Compatible fluid: Water, water + glycol

Max. operating pressure: 4 Bar

Operating temperature: 0 ÷ 90 °C



Associated products

CGP14

System inhibitor 1L

Approvals


Tested according to IEC 60404-5 & ASTM A977 regulations

Warranty

5 Years parts and labour

Features

- o Retains all impurities
- o Self-cleaning
- o Excellent hydraulic properties
- o Can be mounted on vertical, horizontal and diagonal piping
- o Increases the lifespan of the boiler
- o Fights corrosion
- o Maintains optimum system efficiency
- o Easy dosing of the treatment fluids with 0.5L doses
- o Total passage isolating valves

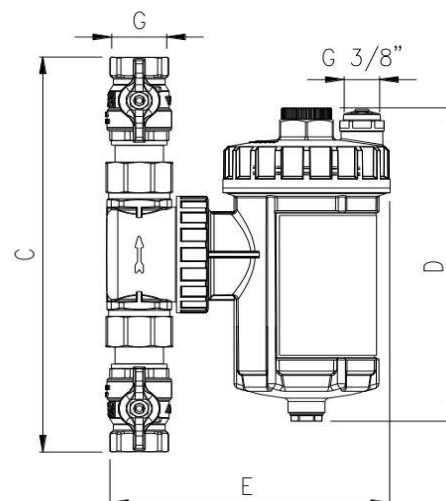

Code	G	C [mm]	D [mm]	E [mm]
HS2319	G 1"	253	189	153
HS23190750	G 1 1/4"	256	189	153