

PT500I

500L Protank Indirect Hot Water Cylinder Dual Coil



Technical Specification

Manufactured by Whitewolf

Country of origin UK

Pressure Ratings


TPR Setting 700 kPa

Maximum supply setting 500 kPa

Factory supply set point 300 kPa

Coil dimensions: 25mm OD, 2x0.878m²

Coil power: 2x22kW

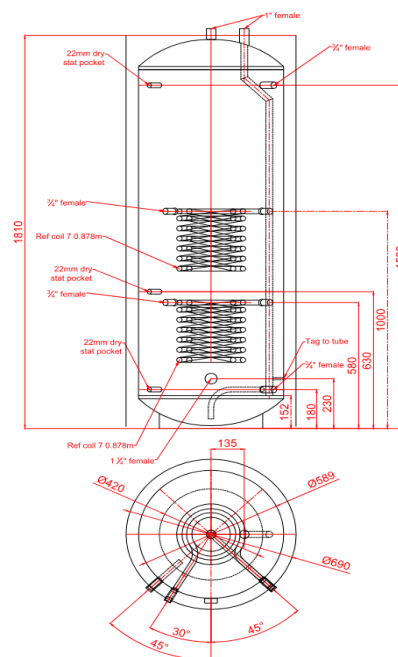

Warranty

5 Years parts and labour + 5 years parts only

Features

DESIGNED SMART IN NEW ZEALAND - BUILT TOUGH IN BRITAIN.

Protank Plus Indirect has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2304 stainless steel and performance matched to Caleffi's latest high flow valve set. The high capacity coil allows large amounts of hot water to be generated from a small foot print

- 500L, 2x22kW coil, 3kW backup
- 1810mm x 700mm (dimension of tank)
- Designed for indoor installation mains pressure domestic hot water systems
- Includes: Protank hot water cylinder, Caleffi TPR valve, Heatrod element(s) and thermostat
- 20 year Protank limited warranty (see specification sheet for more info)

Compatible heat sources: Gas condensing boilers, Diesel condensing boilers, Air to water heat pumps