

PTPC180

Protank Plus 180L with Valve Set



Technical Specification

Manufactured by Whitewolf

Country of origin UK

Pressure Ratings

TPR Setting 700 kPa

Cold water expansion setting 600 kPa

Maximum supply setting 500 kPa

Factory supply set point 300 kPa





Superseded Product

PTC180

Protank 180L

Approvals

MEPS registration: 138254

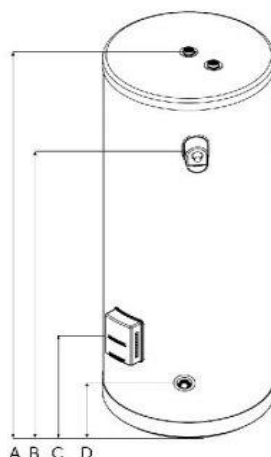

Model	135L	180L
A. Inlet/Outlet height	1380mm	1780mm
B. TPR Valve	1100mm	1050mm
C. Element	260mm	260mm
D. CWE Valve	215mm	215mm
E. Inlet/Outlet centres	110mm	110mm

Warranty

5 Years parts and labour + 5 years parts only + 10 years Pro-rata

Features

Protank Plus has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2304 stainless steel and performance matched to Caleffi's latest high flow valve set.

- 180L, 3kW
- 1780mm x 475mm (dimension of tank)
- Designed for indoor installation mains pressure domestic hot water systems
- Models with valve set include: Protank hot water cylinder, Caleffi 'direct mount mono-block' combo set, Caleffi TPR valve, Heatrod element(s) and thermostat