

## UF1825D1

Caleffi 4 x Circuit Composite Mixing Panel



### Technical Specification

Type: Mixing

Maximum percentage of glycol: 30%

Maximum inlet temperature (°C): 90

Maximum working pressure (Bar): 4

Pipe to manifold connectors: 16x2mm

Panel circuit outlet coupler: 3/4" M

Pipe outlet centres (mm): 50

Primary circuit centres (mm): 60


Case dimension: 700h x 600w x 110d



### Associated products

DBV

Grant Vortex diesel condensing boilers

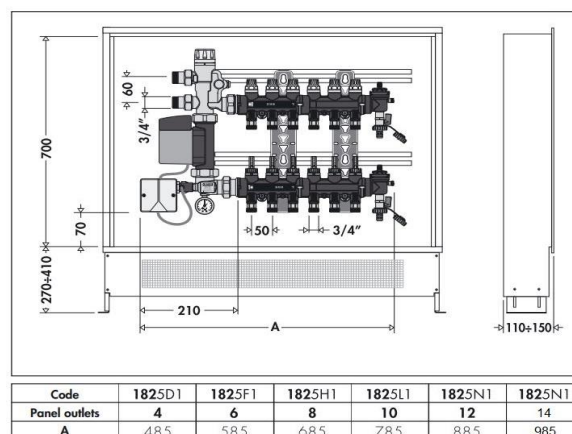

### Warranty

5 Years parts and labour

### Features

The Caleffi composite underfloor panels are fully assembled & wired, modules in cabinet ready to slot into the wall. The thermostatically regulated mixing panel is suitable for high temperature heat sources feeding a low temperature underfloor network. The manifolds ensure that the flow to each circuit is regulated precisely and also control the shut-off, venting and manual removal of air from the system.

Manifolds come fully equipped with flow meters, balancing valves, automatic air vent, fill/drain cock, manifold shut off valves and liquid crystal temperature indicators all as standard.