

WALL MOUNTED BASIN MIXERS

INSTALLATION LIMITATIONS

This product is designed for installation in equal high pressure systems only.


- Recommended working pressure 300kPa, maximum 500kPa
- Maximum test pressure 1000kPa.
- Maximum working temperature 65°C.
- Hot and cold supplies must be protected by line filters

Installation Procedure (see diagram over)

1. Ensure both supply pipes have been flushed and are free from debris before proceeding
2. Securely fix the lugged nipples to a solid substrate taking care to ensure the mixer body is mounted at a depth of between 30mm and 55mm from the finished surface of the wall and the center of the supply pipes.
3. Connect hot and cold pipes to the mixer body. The hot feed should always be positioned on the left and cold on the right.
4. Turn water supply back on and check carefully all connection points for water tightness.
5. Leave the protective sheath on the mixer body while finishing construction takes place around the mixer.
6. When fitting faceplate it is recommended a heavy bead of silicon sealant (or equivalent) be laid between the mixer body and tiled surface to prevent any water entering behind the wall.
7. Depending on the style of mixer you have purchased, use teflon tape or similar on either the spout nipple or the spout thread itself and secure it to the mixer outlet. As required, install the spout onto the nipple and secure with two M6 grub crews.
8. Fit the handle and tighten set screw. If applicable, fit separate handle lever and tighten using rubber sleeve provided taking care not to mark the chrome plated finish.

Care and Use

1. Shutting the tap gently will reduce the chance of water hammer or 'banging' pipes.
2. Regularly clean the taps surface only with non scouring, neutral wash solutions.

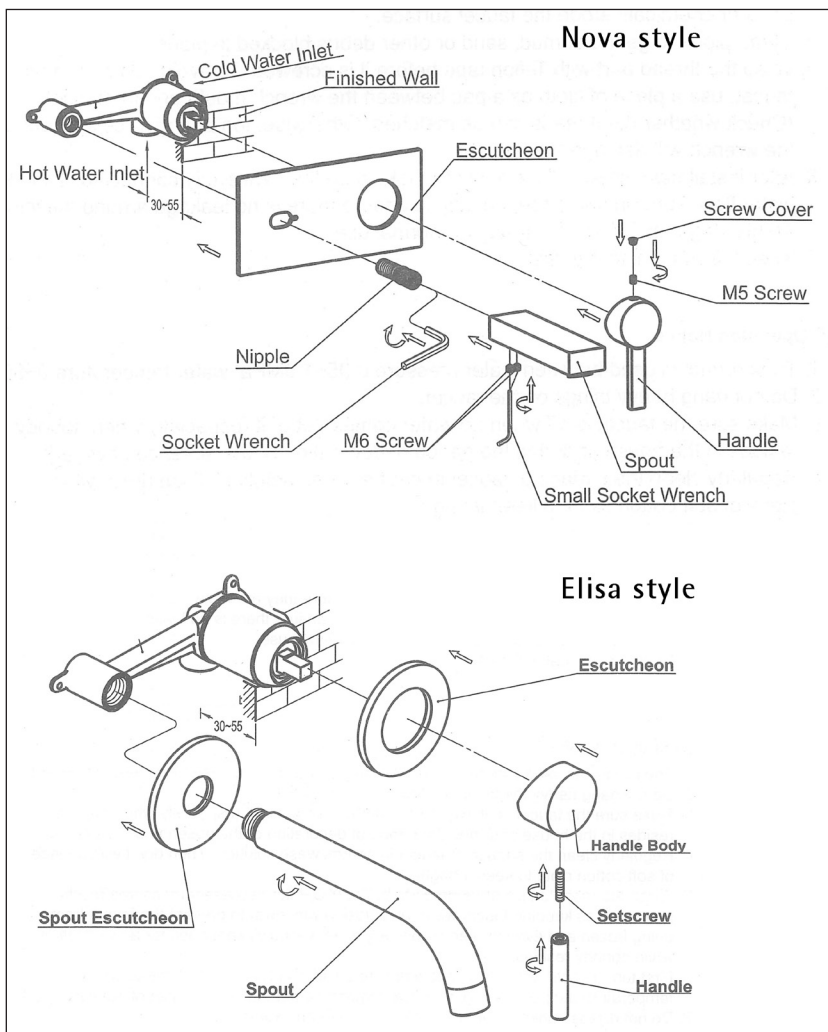

WARRANTY

If any material defect arising from the manufacturing process is found in a new tap or valve Waterware Services Ltd. will undertake to repair or replace it (at its option). This undertaking will not apply if:

1. The defect is brought to Waterware's attention later than 5 years from the date of manufacture.
 2. Failure by any person to follow installation instructions or installation in an environment outside the recommended limitations or relevant NZ and or Australian Standards and local plumbing codes. No installation should proceed without installation instructions and claims instructions were missing are not accepted as a means of avoiding this condition.
 3. Evidence cannot be produced which confirms that the relevant tap or valve was purchased from a known customer of Waterware Services Ltd.
 4. Repair work is undertaken without prior arrangement with Waterware Services Ltd.
 5. Normal maintenance requirements, refer to specific product maintenance guides.
- Waterware Services Ltd. shall in no way be liable for any loss, damage (direct, indirect or consequential), cost or expense suffered or incurred by the purchaser. Obligations accepted by Waterware Products Ltd. are.....

..... in addition to all other rights and remedies had by the Purchaser in law in respect of the valve and does not limit the right the Consumer may have under the Consumers Guarantee Act 1993.

..... subject to the exceptions and conditions previously listed. All expressed or implied conditions, statements or warranties as to the quality or fitness on any purpose of a tap or valve or otherwise are hereby expressly excluded to the fullest extent permitted by law except under conditions and warrants which cannot be legally excluded by law and which are intended in the contract for the supply of the valve by the Trade Practises and any other Act of Law.