

TMV521312

Caleffi 5213 TMV 15mm Tempering Valve



Technical Specification

Temp Adjustment Range 30 - 50°C

Temp Control +/- 2°C

Max Op. Temp. 85°C

Operating Press. Range 20 - 500kPa

Max. Inlet Press. Differential 6:1

Max Test Press. 1000kPa

Min. flow rate 4L/min



Material DZR Brass

Min. Operating Failsafe Temp. Differential 10°C

Approval: AS4032.1



Flow rate graph

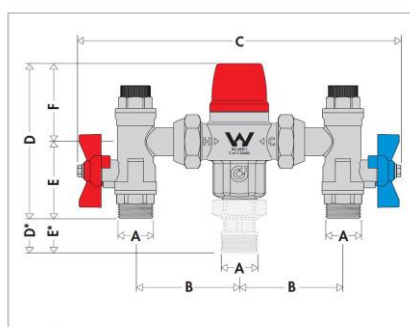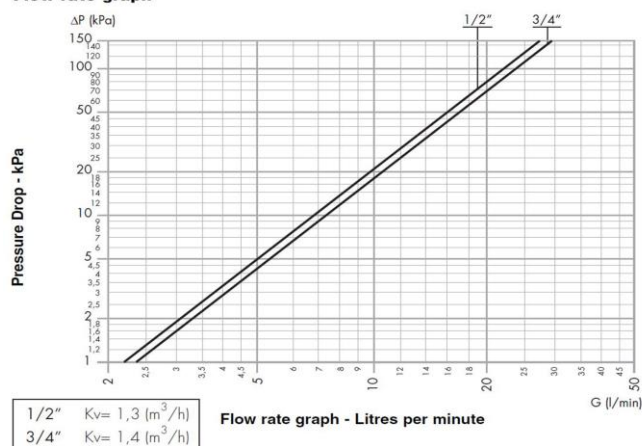

Code	521312TMX	521319TMX
A	1/2"	3/4"
B	62	76
C	198	237,5
D	103	133
E	54,5	84
F	48,5	49

Application

The Caleffi 5213 TMV 15mm Tempering Valve is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

Australian Standards approved TMV valve with 15mm union isolators

Approved for point of use applications e.g. directly under hand basins.

Flow rate between 4 and 27L/min

Recommended working pressure 20 - 500kPa (balanced)

Union isolators with hot and cold check valves

Body in dezincification resistant brass