

TMV521312

Caleffi 5213 TMV 15mm Tempering Valve




Technical Specification

- Temp Adjustment Range 30 - 50°C
- Temp Control +/- 2°C
- Max Op. Temp. 85°C
- Operating Press. Range 20 - 500kPa
- Max. Inlet Press. Differential 6:1
- Max Test Press. 1000kPa
- Min. flow rate 4L/min
- Material DZR Brass
- Min. Operating Failsafe Temp. Differential 10°C




Flow rate graph

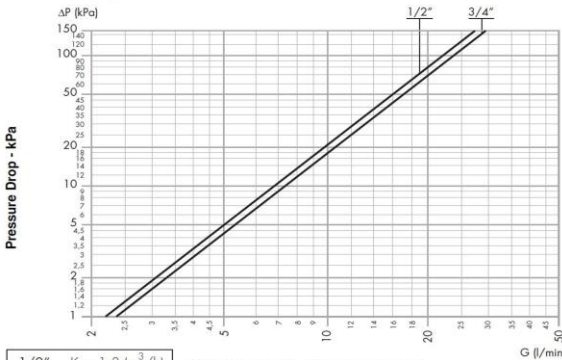

1/2"	Kv= 1,3 (m <sup>3</sup> /h)
3/4"	Kv= 1,4 (m <sup>3</sup> /h)

Flow rate graph - Litres per minute

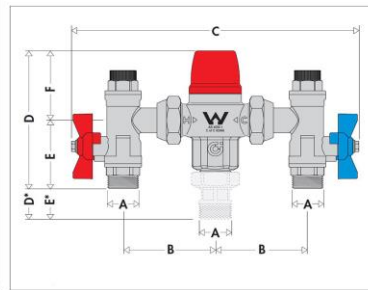

Code	521312TMX	521319TMX
A	1/2"	3/4"
B	62	76
C	198	237,5
D	103	133
E	54,5	84
F	48,5	49

Application

The Caleffi 5213 TMV 15mm Tempering Valve is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

Warranty

[Download the latest warranty statement](#)

Features

- Australian Standards approved TMV valve with 15mm union isolators
- Approved for point of use applications e.g. directly under hand basins.
- Flow rate between 4 and 27L/min
- Recommended working pressure 20 - 500kPa (balanced) Body in dezincification resistant brass