DBVO₂₆

Grant Vortex Outdoor Diesel Condensing Boiler 26kW





Technical Specification

Water content litre: 19 Weight (dry) kg: 126.5 Max. heat output kW: 26

Flow & Return connections: 22mm
Min. flow rate (△T=10°C) I/h: 2,200
Condensate connection: 22mm
Waterside resistance: 26 mbar
Maximum static head: 28m


Boiler thermostat range: 65°C to 75°C Limit (safety) stat shut off temp: 111°C

Max. hearth temperature: 50°C

Electricity supply: 240v - 50hz @ 5amp

Motor power: 90 watts Starting current: 2.6 amps Running current: 0.85 amps Oil connection: 1/4" BSP Max operating press



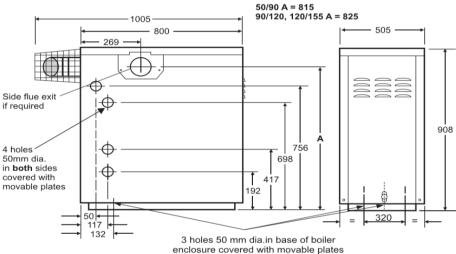

Warranty

Download the latest warranty statement

Features

Floor standing outdoor 15.0 - 26kW diesel condensing boiler with dual set point for central heating and or an indirect domestic hot water system.

High efficiency multipass combustion chamber with an internal Riello RDB blown diesel burner, automatic air vent valve, circulating pump, expansion tank and safety valve.

908mm high x 505mm wide x 800mm deep

Made in Ireland

