

TMV15SS4B

Caleffi TMV Stainless Steel Enclosure 4 Pipe Bottom Entry 15mm



Technical Specification

Recommended working pressure 20 – 500kPa (balanced)

Kv = 25L/min



Union isolators with hot and cold check valves

Temperature range adjustable 30 – 50°C

Temperature control +/- 2°C

Max. operating temperature 85°C

Body in dezincification resistant brass

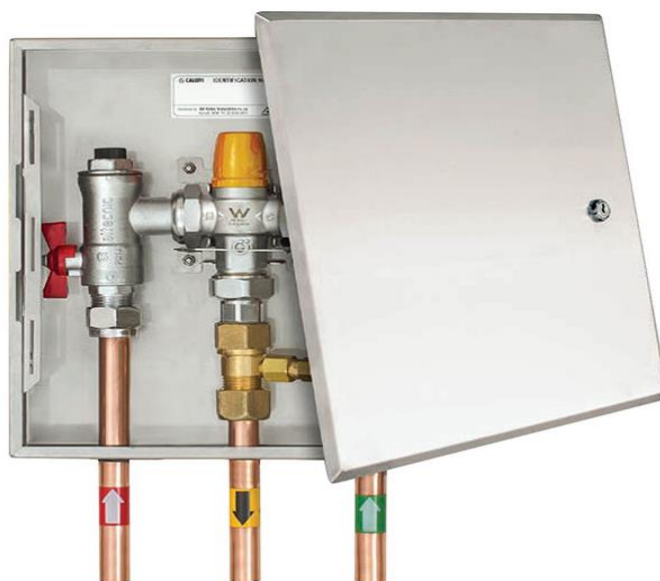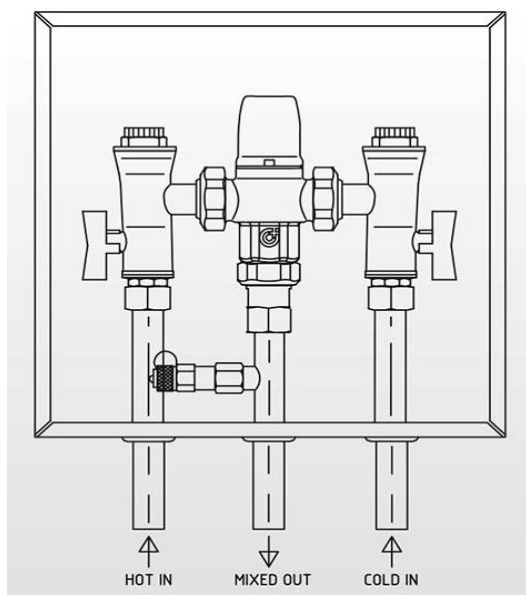

Approvals

Certified to AS 4032.1

Warranty

5 years parts and labour

Features

4 Pipe, bottom entry, UK NHS and Australian standard specification TMV valve with 15mm union isolators in a recessed, 304 stainless steel, lockable enclosure.

For point of use applications e.g. directly under hand basins and alike with a flow rate between 4 and 25L/min