

# TMVSSTM15TH

Caleffi 5213 TMV Tempering Valve Module 15mm



## Technical Specification

Temp Adjustment Range 30 - 50°C

Temp Control +/- 2°C

Max Op. Temp. 85°C

Operating Press. Range 20 - 500kPa

Max. Inlet Press. Differential 6:1

Max Test Press. 1000kPa

Min. flow rate 4L/min



Material DZR Brass

Min. Operating Failsafe Temp. Differential 10°C

Approvals AS4032.1



Flow rate graph

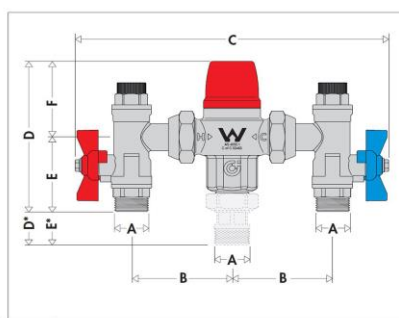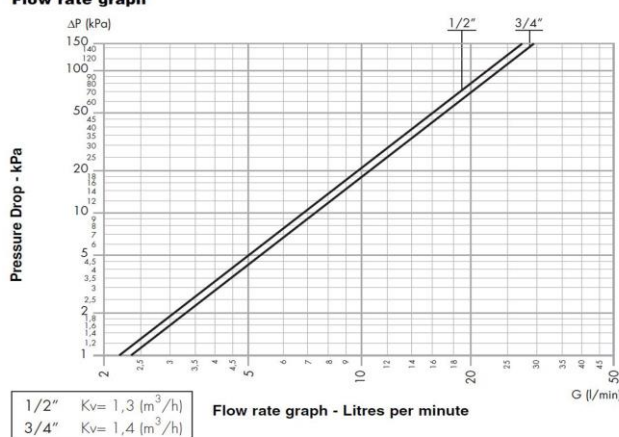

Code	521312TMX	521319TMX
A	1/2"	3/4"
B	62	76
C	198	237,5
D	103	133
E	54,5	84
F	48,5	49

## Application

The Caleffi 5213 TMV Tempering Valve Module 15mm is used in plumbing systems to control water temperature and is installed mostly at point of delivery.

## Warranty

[Download the latest warranty statement](#)

## Features

Thermostatic mixing valve with 15mm union isolators, check valves, and strainers

Approved for point of use applications e.g. directly under basins

In wall polished Stainless steel box with hinged door and lock

Dimensions 300x300x70