

BV20M

Airaga Ball Valve 20m x 20m




Technical Specification

Threaded connections: UNI ISO 228/1 (Cylindric)

Working temperature: service limit from -20°C to +120°C

Maximum working pressure: 40PN

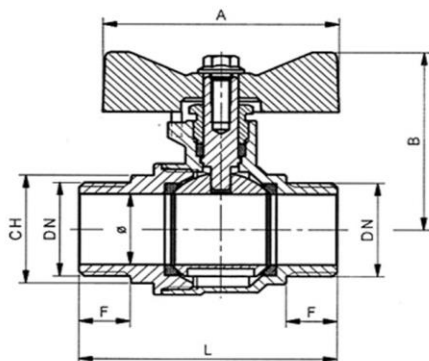

Cod.	0855/03	0855/04	0855/05	0855/06
DN e pass. mm	3/8" (10)	1/2" (15)	3/4" (20)	1" (25)
L	48,5	55,5	66,5	77,5
B	35,5	38	50	53
F	10,5	11	13	15
CH	17	22	27	34
A	50	50	60	60

Application

The Airaga Ball Valve 20m x 20m is used in plumbing systems to control water flow rate or balancing and is installed mostly in plant rooms.

Warranty

[Download the latest warranty statement](#)

Features

Body and sleeve: hot moulded from EN12165 CW617N bar, nickel plated

Gland and stem: worked from EN12164 CW617N bar

Ball: 3/8" turned from EN12164 CW617N bar, from 1/2" to 1" hot moulded from EN12165 CW617N bar, diamond and chrome plated

Antifriction ring: worked from EN12164 CW617N bar

Ball gaskets: P.T.F.E.

Stem gasket: P.T.F.E.

Butterfly handle: die cast or melted in alluminium alloy UNI 1706, sandblasted and coated with epoxidic paints

Nut: UNI 5589-65 - galvanized steel

Seal for threads: "Loctite" type anaerobic adhesive

External treatment : brilliant nickel plated surface