

BVUF20F

Airaga Union Ball Valve 20f x 20f




Technical Specification

Threaded connections: UNI ISO 228/1 threads.

Working temperature: service limit from -10°C to +120°C

Maximum working pressure: 20PN

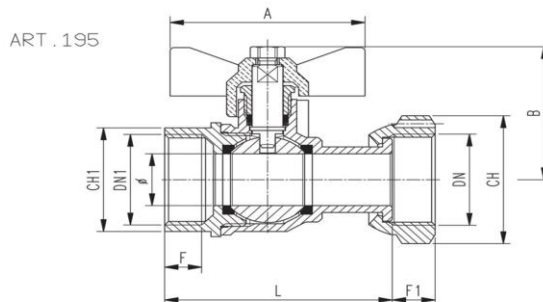

ART. 195

Cod.	0195/04-R	0195/05-R	01950060501NF	01950060601NF
DN x DN1 e pass. mm	3/4"B x 1/2"F (15)	3/4"B x 3/4"F (15)	1"B x 3/4"F (20)	1"B x 1"F (20)
L	60	58,5	66,5	68
B	38,5	38,5	52	52
F	13,5	10,5	12	12,5
F1	9,5	9,5	9,5	9,5
CH	32	32	37	37
CH1	24	30	31	38
A	50	50	50	50

Warranty

[Download the latest warranty statement](#)

Features

Body and sleeve: hot moulded from EN12165 CW617N bar, nickel plated.

Gland and stem: worked from EN12164 CW617N bar.

Ball: moulded from EN12165 CW617N bar, diamond and chrome plated.

Stem-stopping ring: worked from EN12164 CW617N bar.

Ball gaskets: P.T.F.E.

Stem gasket: P.T.F.E.

Butterfly handle: die cast or melted in aluminium alloy UNI EN 1706, sandblasted and coated with epoxidic paints.

Nut :worked from EN12164 CW612N bar, nickel plated.

Screw: UNI 5739 - galvanized steel.

Seal for threads: "Loctite" type anaerobic adhesive.

External treatment : brilliant, nickel plated surface.

Drilled swivel union nut

For counter meters