




Technical Specification

Threaded Connections: UNI ISO 228/1 threads

Working temperature: service limit from -20°C to +120 °C

Maximum working pressure: 20PN

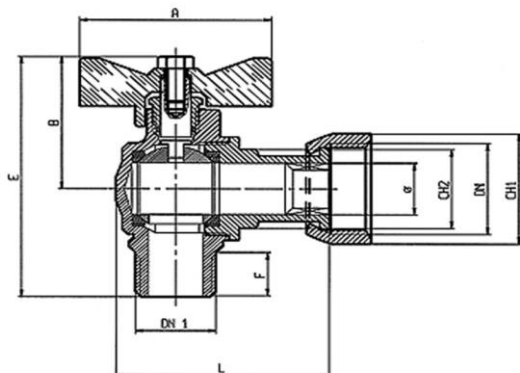

Cod.	0311A040501	0311A050501	0310A050601
DN x DN1 e pass. mm	3/4"B x 1/2"M (15)	3/4"B x 3/4"M (15)	1"B x 3/4"M (20)
L	55,5	55,5	61
E	70	70	79
B	38,5	38,5	47
F	13	15	15,5
CH1	32	32	37
CH2	21	21	30
A	50	50	50

Warranty

[Download the latest warranty statement](#)

Features

Body and sleeve: hot moulded from EN12165 CW617N bar, nickel plated

Gland and stem: worked from EN12164 CW617N bar

Ball: hot moulded from EN12165 CW617N bar, diamond and chrome plated

Stem stopping ring: worked from EN12164 CW617N bar

Ball gaskets: P.T.F.E.

Stem gasket: P.T.F.E.

Butterfly handle: die cast or melted in alluminium alloy UNI 1706, sandblasted and coated with epoxidic paints

Plug: hot moulded from EN12165 CW617N bar, nickel plated

Swivel nut: worked from EN12164 CW612N bar, nickel plated

Screw: UNI 5739 - galvanized steel

Seal for threads: "Loctite" type anaerobic adhesive

External treatment: brilliant nickel plated surface