

BVUM20F

Airaga Union Ball Valve 20m x 20f



Technical Specification

Body: hot moulded from OT58 UNI 5705-65 bar, sandblasted.

Gland: worked from OT58 UNI 5705-65 bar.

Ball: moulded-melted-turned from OT58 UNI 5705-65 bar, diamond and chrome plated to thickness.

Gaskets: P.T.F.E. virgin-hardness 55-60 shore D.


Operating lever and baffle: die cast or melted in aluminium alloy UNI 5076-74, sandblasted and coated with epoxidic paints.

External treatment valve: nickel surface.

WORKING CONDITIONS

Test pressures: body 30 BAR (hydraulic), seat 7 BAR (pneumatic).

Working temperature: range from -20°C to +150°C.

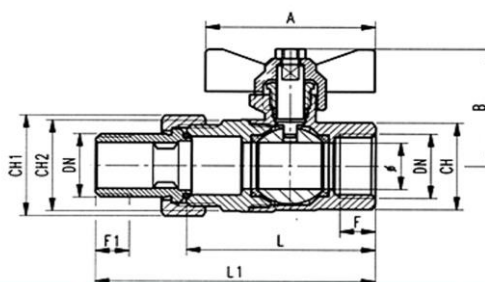

Cod.	0200/04D	0200/05D	0200/06D	0200/07D	0200/08D
DN e PASS. mm	1/2" (15)	3/4" (20)	1" (25)	1 1/4" (32)	1 1/2" (40)
L	56	67	79	90,5	107
L1	82,5	98	113	129	150
B	38	42	53	66	72
F	10,5	12	13,5	15,5	15,5
F1	10	12	14	15	18
CH	25	31	38	47	54
CH1	30	37	46	53	64
CH2	27	34	42	48	60
A	50	50	60	65	65

Application

The Airaga Union Ball Valve 20m x 20f is used in heating & cooling systems to control water flow rate or balancing and is installed mostly in plant rooms.

Warranty

[Download the latest warranty statement](#)

Features

20mm male union/20mm female

Ideal for connecting to the Protank series without TV group.