

## PTPC250D

Protank Plus 250L with Valve Set



### Technical Specification

Manufactured by Whitewolf

Country of origin UK



Pressure Ratings

TPR Setting 700 kPa

Cold water expansion setting 600 kPa

Maximum supply setting 500 kPa

Factory supply set point 300 kPa

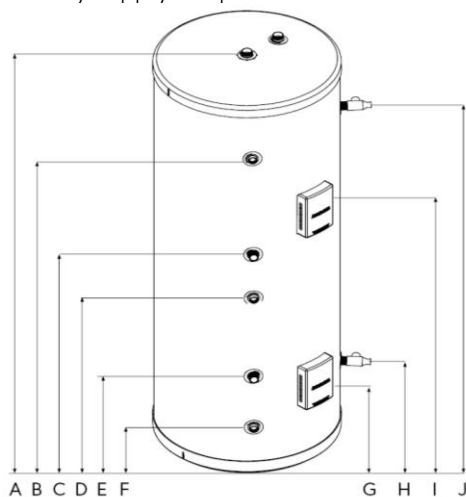

Model	250L	300L	400L	500L
A. Inlet/Outlet height	1780mm	2000mm	1550mm	1800mm
B. Upper Stat	1500mm	1760mm	1250mm	1550mm
C. Middle Stat	600mm	600mm	600mm	600mm
D. Upper Solar	900mm	900mm	900mm	900mm
E. Lower Stat	215mm	215mm	215mm	215mm
F. Lower Solar	175mm	175mm	175mm	175mm
G. Lower Element	260mm	260mm	260mm	260mm
H. C/W Valve	215mm	215mm	215mm	215mm
I. Upper Element	1270mm	1430mm	1200mm	1285mm
J. TPR Valve	1500mm	1760mm	1250mm	1550mm
K. Inlet/Outlet centers	110mm	110mm	135mm	135mm



### Superseded Product

PTC250

250L Protank Indirect Hot Water Cylinder

### Approvals

MEPS

### Warranty

5 years parts and labour + 5 years parts only + 10 years pro-rata

### Features

DESIGNED SMART IN NEW ZEALAND - BUILT TOUGH IN BRITAIN.

Protank Plus has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2304 stainless steel and performance matched to Caleffi's latest high flow valve set.

250L, 3+3kW, solar ports

1780mm x 550mm (dimension of tank)

Designed for indoor installation mains pressure domestic hot water systems

Models with valve set include: Protank hot water cylinder, Caleffi 'direct mount mono-block' combo set, Caleffi

TPR valve, Heatrod element(s) and thermostat

20 year Protank limited warranty (see specification sheet for more info)