

BVG20

Airaga Gas Ball Valve 20m x 20f



Technical Specification

Body and sleeve: hot moulded from EN12165 CW617N bar. Stem: worked from EN12164 CW617N bar.

Ball: 3/8" turned from EN12164 CW617N bar, from 1/2" to 1" hot moulded from EN12165 CW617N bar, diamond and chrome plated.

Ball gaskets: P. T. F. E.

Stemgasket: nr.2 O-Rings Viton.

Operating lever: steel DD11 EN10111, galvanized and coated with PVC.

Nut: UNI 5589-65 galvanized steel.

Threaded connections: UNI ISO 228/1 threads.

Seal for threads: "Loctite" type anaerobic adhesive.

External treatment: nickel surface

Working temperature: service limit from -20 °C to +60 °C.

Maximum operating pressure (MOP): 5 bar (0,5 Mpa).



Application

The Airaga Gas Ball Valve 20m x 20f is used in plumbing, heating & cooling systems to control water flow rate or balancing and is installed mostly in plant rooms.

Warranty

[Download the latest warranty statement](#)


Features

Ball valve for gas meter

Male/female fittings

20mm male/20mm female

Yellow lever handle

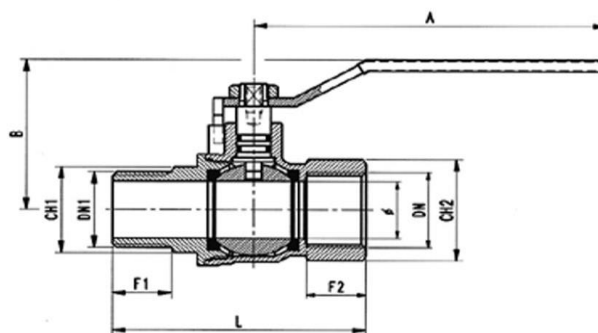

Cod.	0333A030314N	0333A040414N	0333A050514N	0333A060614N
DN e PASS. mm	3/8" (12)	1/2" (15)	3/4" (20)	1" (25)
L	48	62	70	82
B	42,5	44	52,5	57
F1	12	17	18,5	21
F2	12	17	18,5	21
CH1	22	26	32	40
CH2	22	26	32	40
A	90	90	110	110