

## TV521319APT

Caleffi 5213 20mm NHS Tempering Valve



### Technical Specification

Temp Adjustment Range 30 - 50°C

Temp Control +/- 2°C

Max Op. Temp. 85 °C

Operating Press. Range 20 - 500 kPa


Max. Inlet Press. Differential 6:1

Max Test Press. 1000 kPa

Min. flow rate 4 L/min

Material DR Brass

Min. Operating Failsafe Temp. Differential 10°C

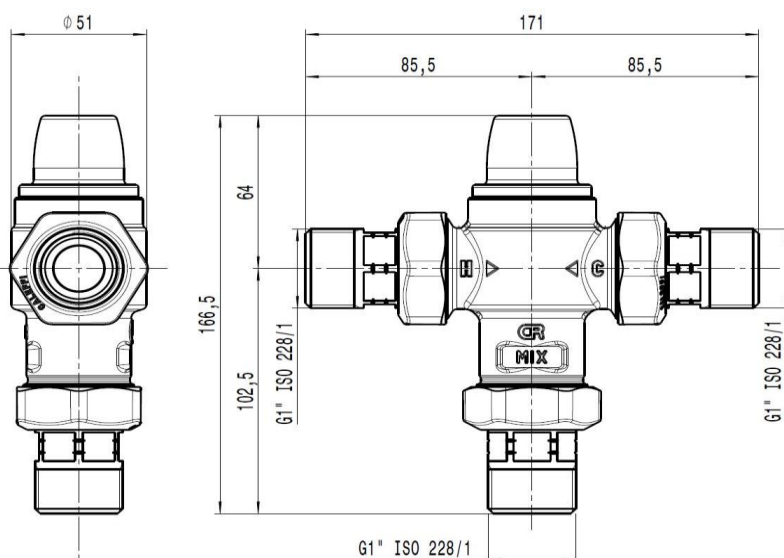

### Approvals

Certified to AS 4032.2

NHS D08, BS 7942, EN 1111 and EN 1287

### Warranty

5 years parts and labour

### Features

UK NHS and Australian Standard specification valve with 20mm unions, 2x 20mm m/f ball valves, and 2x 20mm female brass tees

Union connectors with o-ring seal with hot and cold check valves

For point of use applications i.e; directly under hand basins and alike with a flow rate between 4 and 27L/min

Recommended working pressure 100 - 500kPa (balanced)

Kv = 27L/min

Temperature range adjustable 30 - 50°C

Temperature control +/- 2°C

Max. operating temperature 85°C

Body in dezincification resistant brass