



Technical Specification

Manufactured by Whitewolf

Country of origin UK

135L, 30kW coil, 3kW backup


1380mm x 475mm (dimension of tank)

Pressure Ratings:

TPR Setting 700kPa

Coil dimensions: 20mm OD, 1.6m²

Coil power: 30kW

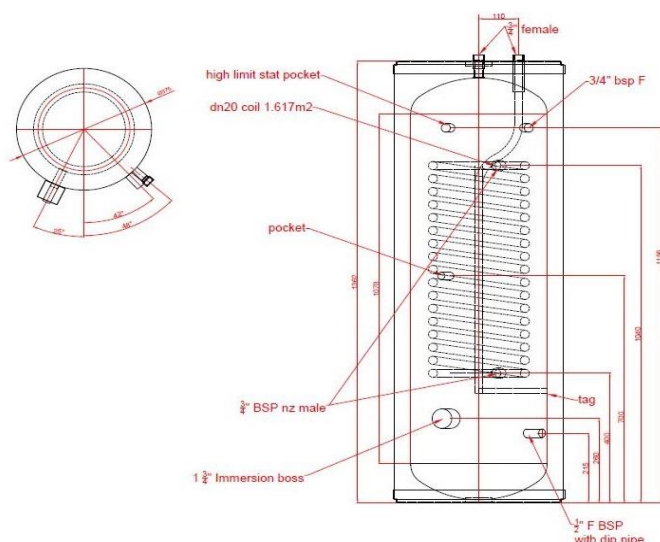

Application

The Protank Plus Indirect 135L with TPR and Element is used in heating systems to generate hot water for potable applications using an external heat source and is installed mostly to feed a bathroom.

Warranty

5 years parts and labour + 5 years parts only

Features

DESIGNED SMART IN NEW ZEALAND - BUILT TOUGH IN BRITAIN.

Protank Plus Indirect has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2304 stainless steel. The high capacity coil allows large amounts of hot water to be generated from a small foot print

Designed for indoor installation mains pressure domestic hot water systems

20 year Protank limited warranty (see specification sheet for more info)

Compatible heat sources: Gas condensing boilers, Diesel condensing boilers, Air to water heat pumps