



## Technical Specification

Manufactured by Whitewolf

Country of origin UK

135L, 30kW coil, 3kW backup

1380mm x 475mm (dimension of tank)

Pressure Ratings:

TPR Setting 700kPa


Cold water expansion setting 600kPa

Maximum supply setting 500kPa

Factory supply set point 300kPa

Coil dimensions: 20mm OD, 1.6m<sup>2</sup>

Coil power: 30kW

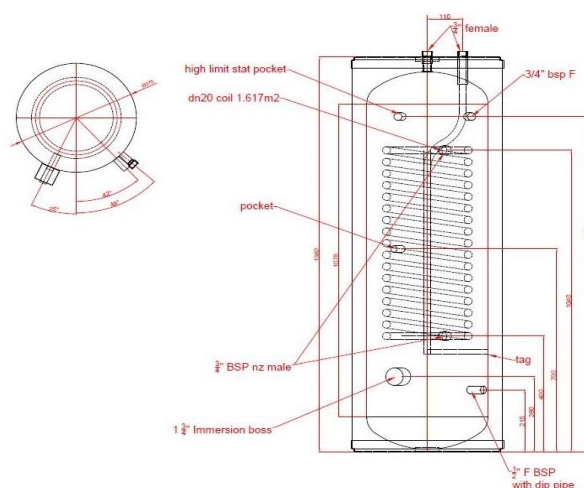

## Application

The Protank Plus Indirect 135L with Valve Set is used in heating systems to generate hot water for potable applications using an external heat source and is installed mostly to feed a bathroom.

## Features

DESIGNED SMART IN NEW ZEALAND - BUILT TOUGH IN BRITAIN.

Protank Plus Indirect has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2304 stainless steel and performance matched to Caleffi's latest high flow valve set. The high capacity coil allows large amounts of hot water to be generated from a small foot print

Designed for indoor installation mains pressure domestic hot water systems

Models with valve set include: Protank hot water cylinder, Caleffi 'direct mount mono-block' combo set, Caleffi TPR valve, Heatrod element(s) and thermostat

Warranty (20 years)

5 Years parts and labour + 5 years parts only + 15 years pro-rata,

Electric element - 1 year pars/labour

Valves - 5 years parts/labour

Compatible heat sources: Gas condensing boilers, Diesel condensing boilers, Air to water heat pumps