



Technical Specification

- Suitable for Briza 12 Naked 520x1220
 - Aluminium adjustable slot diffuser
 - sleek design with adjustable deflectors
 - slot width 25mm.
 - wide temperature range for both heating and cooling
- Airflow direction: lateral, axial, adjustable
 Airflow type: linear, exhaust or supply
 Frame size: 20 mm
 Slot width: 25 mm
 Material: extruded aluminium, satin anodized 11µm
 Finishing: powder coating RAL 9003
 Deflectors: powder coated extruded aluminium, black
 Deflector fixation piece: synthetic
 Mounting: with mounting brackets



Application


The Briza 12 Slot defuser 1090mm is used in heating & cooling systems to deliver hot or cold air and is installed mostly at point of delivery.

Warranty

[Download the latest warranty statement](#)

Features

The adjustable slot diffuser is suitable for the supply and exhaust of cooled and heated air. Each slot is individually adjustable and is equipped with 2 specially designed discrete deflectors (slot width 25mm). This results in an ideal air flow pattern that can be adjusted by 180° (vertical and horizontal air flow).

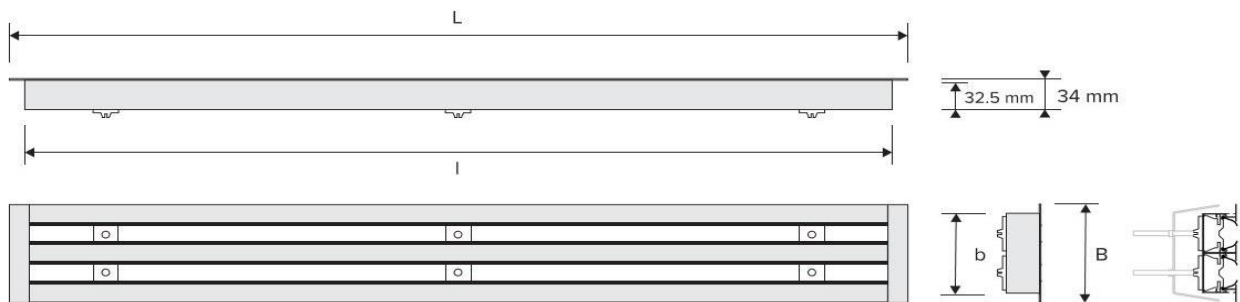

Briza 12	Frame external dimensions		Frame internal dimensions	
	Length (L)	Width (B)	Length (l)	Width (b)
T4 / 122	109	11	105.5	9