




## Technical Specification

- Maximum boiler output: 70kW
- Diameter: 180mm
- Minimum exit height: 1280mm
- Maximum exit height: 1700mm
- Maximum possible length: 6m

- 26 kW: Ø150mm
- 36 & 46 kW: Ø180mm

**\*Max. possible length 6m (total)**

- Contents of 1.2m side flue set:
- Short starter section A
  - Vertical telescopic section B/C
  - Horizontal telescopic section [inc. terminal] D/E
  - 90° Elbow D
  - Locking bands
  - Inner seals (red)
  - Outer seal (black)
  - Boiler connector (with clamp) Dress plates (inner & outer)
  - Fitting instructions

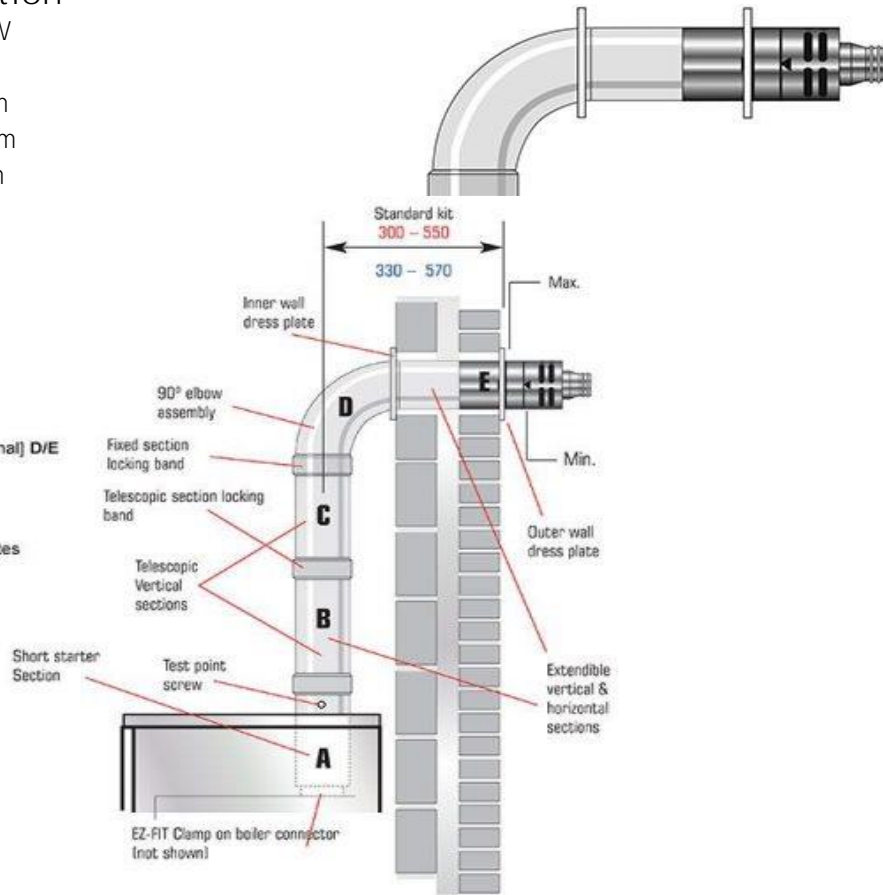

## Application

The Grant Vortex Side Flue Set 1.2m 36-46kW is used in heating systems to generate mechanical hot water and is installed mostly in plant rooms.

## Warranty

[Download the latest warranty statement](#)

## Features

High level balanced flue kits feature the same EZ-Fit boiler connections as the low level flue. The unique clamping system on the high level flue ensures easy assembly thereby reducing installation costs. The kits may be extended horizontally and vertically. It is now possible to create offsets in standard high level flue systems by using our 45° elbows and extension kits – increasing the versatility of this new range.

The high level kits feature self sealing exhaust ducts and a quick-fit locking band connection for the air duct, which vastly reduces the time taken to complete the installation