



## Technical Specification


Maximum boiler output: 70kW

Diameter: 180mm

Maximum possible length: 8m

26 kW: Ø150mm  
 36 and 46 kW: Ø180mm  
 \*Max. possible length 10m

- Contents of 3m top flue set:**
- Short starter section **A**
  - Vertical telescopic section **B/C**
  - Fixed section 950mm **D**
  - Terminal section **E** (inc storm collar)
  - Locking bands (not shown)
  - Inner seals (incl)
  - Boiler connector (w/ clamp)
  - Ceiling dress plate (not shown)
  - Firestop spacers (not shown)
  - Wall bracket
  - Fitting instructions

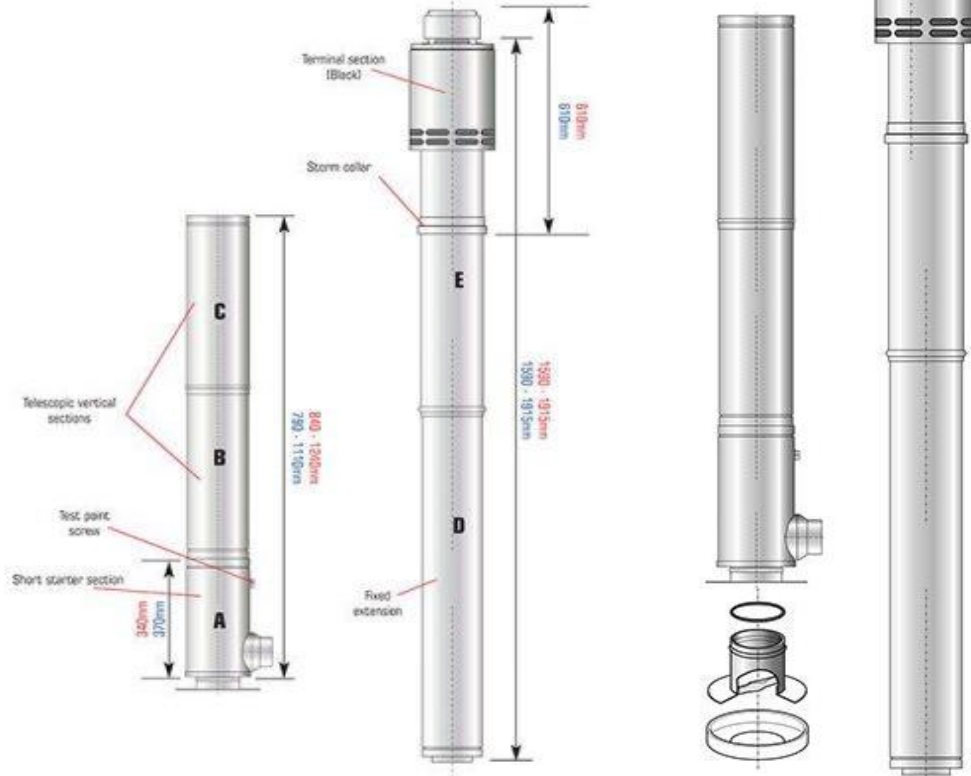

## Application

The Grant Vortex Top Flue Set 3m 36-46kW is used in heating systems to generate mechanical hot water and is installed mostly in plant rooms.

## Warranty

[Download the latest warranty statement](#)

## Features

Vertical balanced flue kits share the same EZ-Fit boiler connections as our high level kits. The unique clamping system on the vertical balanced flue ensures easy assembly thereby reducing installation costs.

As with our high level kits it is now possible to create offsets in straight flue runs by using our 45° elbows and adjustable extension kits – increasing the versatility of this new range.

Vertical balanced flues can be extended to a maximum length of 8 metres on condensing boilers in a straight run using the extension kits. Deduct one metre for each additional 45° elbow [maximum 4 elbows]