

PTPSC185

Protank Plus 2.0 185L with Valve Set



Technical Specification

185L, 3kW

1780mm x 475mm (dimension of tank)


Pressure Ratings

TPR Setting 700 kPa

Cold water expansion setting 600 kPa

Maximum supply setting 500 kPa

Factory supply set point 300 kPa

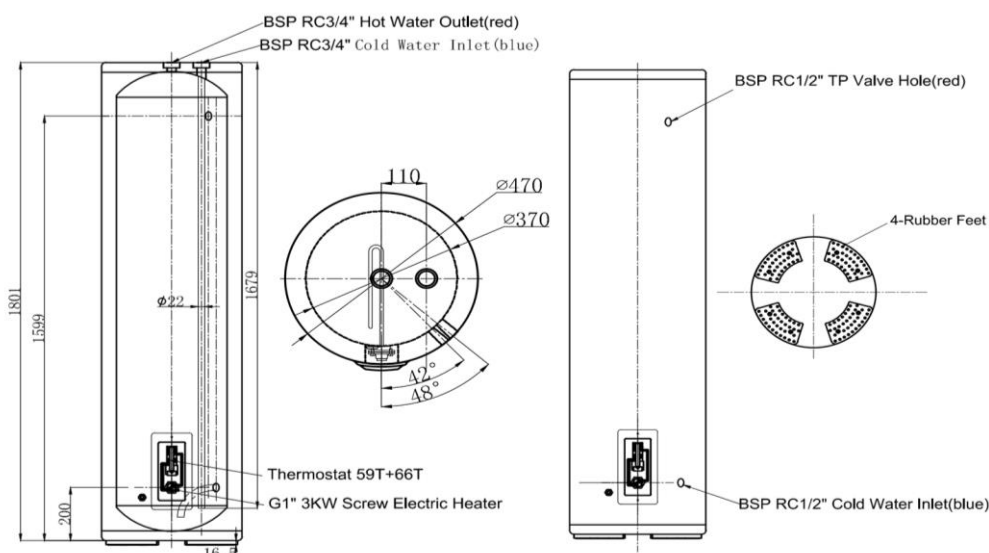

Application

The Protank Plus 2.0 185L with Valve Set is used in plumbing systems to generate hot water for potable applications using an electric element and is installed mostly in hot water cylinder cupboards.

Warranty

5 years parts and labour + 5 years parts only + 10 years pro-rata

Features

Protank Plus has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2205 stainless steel and performance matched to Caleffi's latest high flow valve set.

185L, 3kW

1800mm x 475mm (dimension of tank)

Designed for indoor installation mains pressure domestic hot water systems

Models with valve set include: Protank hot water cylinder, Caleffi 'direct mount mono-block' combo set, Caleffi TPR valve, Heatrod element(s) and thermostat

Warranty Info

20 year Protank limited warranty (see specification sheet for more info)

Electric Element – 2 year parts/labour

Valves – 5 years parts/labour