

PTPSC185I

Protank Plus 2.0 Indirect 185L with Valve Set



Technical Specification

185L, 3kW

1818mm x 470mm (dimension of tank)


Pressure Ratings

TPR Setting 700 kPa

Cold water expansion setting 600 kPa

Maximum supply setting 500 kPa

Factory supply set point 300 kPa

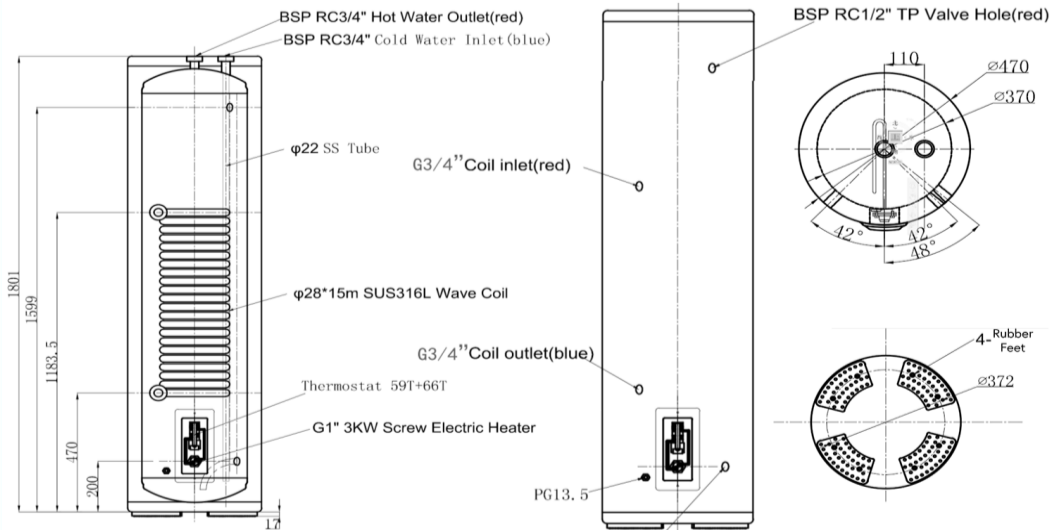

Application

The Protank Plus 2.0 Indirect 185L with Valve Set is used in plumbing systems to generate hot water for potable applications using an external heat source and is installed mostly in hot water cylinder cupboards.

Warranty

[Download the latest warranty statement](#)

Features

Protank Plus Indirect has been developed to meet the needs of those home owners wanting a high capacity, high pressure hot water system that is going to last. The internal tank and fittings are crafted from the highest possible spec 'Duplex' 2205 stainless steel and performance matched to Caleffi's latest high flow valve set. The high capacity coil allows large amounts of hot water to be generated from a small foot print

185L, 30KW coil, 3KW backup

1818mm x 470mm (dimension of tank)

Designed for indoor installation mains pressure domestic hot water systems

Models with valve set include: Protank hot water cylinder, Caleffi 'direct mount mono-block' combo set, Caleffi TPR valve, Heatrod element(s) and thermostat