

PRV20G

Caleffi 533 Series Pressure Reducing Valve 20mm with Gauge



Technical Specification

20mm PRV, strainer and gauge

Maximum upstream pressure: 1600kPa

Downstream pressure setting range: 100-550kPa


Factory setting: 300kPa

Maximum working temperature: 80°C

Connections

Main connections: 3/4" F

Pressure gauge connection: 1/4" F

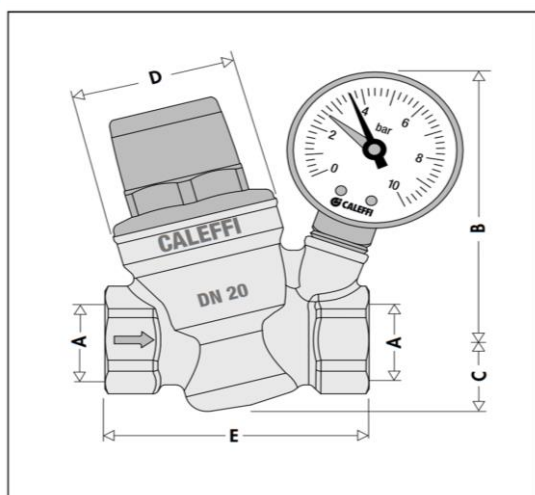

| Code | DN | A | B | C | D | E | Mass (kg) |
|---------|----|------|----|----|------|----|-----------|
| 533251H | 20 | 3/4" | 86 | 22 | Ø 46 | 72 | 0,47 |



Application

The Caleffi 533 Series Pressure Reducing Valve 20mm with Gauge is used in plumbing systems to control water pressure and is installed mostly in hot water cylinder cupboards.

Warranty

[Download the latest warranty statement](#)

Features

Pressure reducing valves are installed in residential water system to reduce and stabilise inlet pressure from the water network which is generally too high and variable for domestic systems to work properly.

The 533. series was created for small systems, such as apartments, and to protect water storage heaters, where size and absence of noise are of particular concern.