### GTECO2020EXP

ECOSAFE Floor Mounted Drench Shower with Pull Rod and Stainless Steel Shower Head






## **Technical Specification**

Materials: 304 Stainless Steel

Outlet (Shower): Drench shower at least 75.7L/min

Working Pressures: 200kPa - 500kPa Working Temperatures: 16°C - 38°C Finish / Colour: Polished Stainless Steel

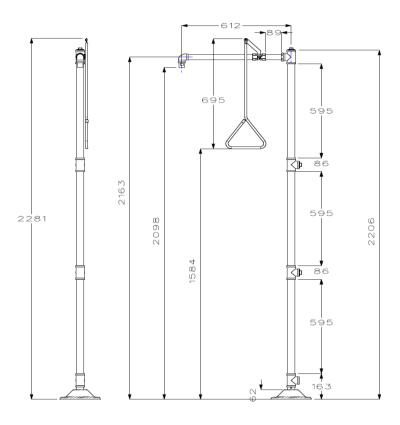



# Warranty

## Download the latest warranty statement

#### Features

Signs included with product

Water distribution pattern in shower head and the flow holes are designed to prevent any lime build up or restrictions

Shower spray has a minimum diameter of 50.8cm for complete coverage

Water pressure regulated for optimal results without being damaging.

Valves available for temperatures in excess of 38°C

Recommended for science, education and industrial projects

