


# GTMVPM5000

Tempset Thermostatic Mixing Valve with Temperature Control Dial



## Technical Specification

- Material: Brass
- Cartridge: Thermostatic
- 6 Volt solenoid
- Inlet: 15mm Male (G 1/2" BSP)
- Outlet: Aerated flow
- Run time: 2 seconds (auto on/off)
- Working Pressures: 50kPa - 500kPa
- Rec. Working Pressure: 350kPa
- Working temperatures: 10°C - 50°C
- Mixed outlet temperature: 35°C - 50°C
- Hot inlet temperature: min 55°C - max 80°C
- Cold inlet temperature: min 5°C - max 30°C
- Finish: Chrome-plated

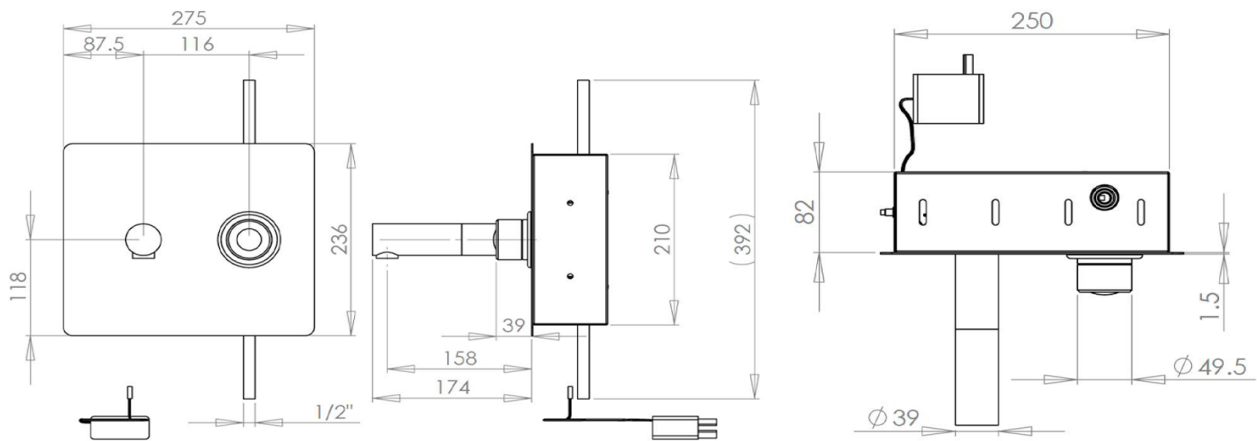

## Warranty

[Download the latest warranty statement](#)

## Features

- Point-of-use to reduce risk of legionella
- Thermostatic valve is located under the handle for easy maintenance
- Supplied with strainers, and non-return/isolating valves
- External temperature control
- Recommended for health projects