


# GTPLUS1000BM

Smartec Plus Electronic Single Temperature Bench Mounted Tap



## Technical Specification

- Material: Stainless steel, plastic solenoid valve
- Inlet: 15mm flexible connection
- Outlet: 15mm aerator
- Working Pressures: 50kPa - 500kPa
- Rec. Working Pressure: 350kPa
- Max Working Temp: 50°C
- Valve: 6 Volts solenoid (15mm connection)
- Finish: Polished/satin

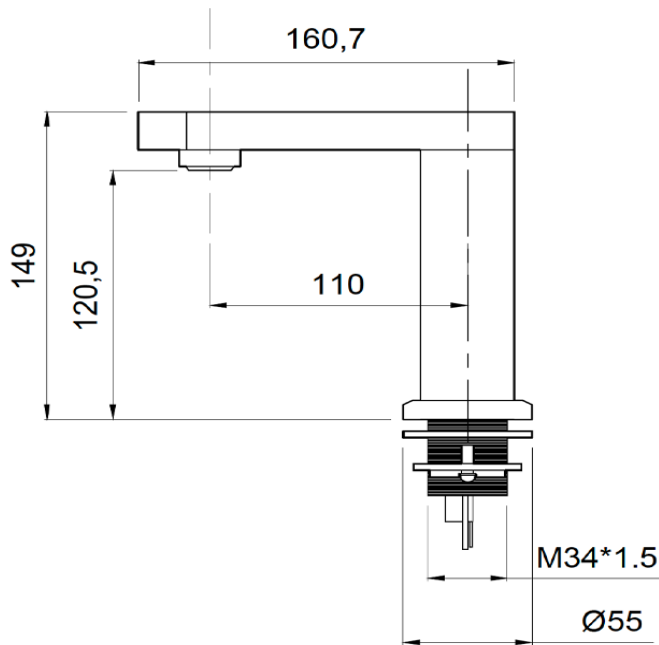

## Warranty

[Download the latest warranty statement](#)

## Features

- WELS 6 Star 6L/min
- Hygiene flush included to assist with infection control and reduce risk with Legionella growth
- Angled Tap into the bowl to avoid waterpooling assists in better infection control.
- Laser sensor technology stops nuisance triggering and activates on all colored skintones.
- Run time, sensitivity and hygiene flush is programmable by remote control.
- Supplied with inlet strainer and flow controller.
- IP rated control box enclosure houses the solenoid valve and waterproof connections.