


# GTPLUS2500BM

Smartec Plus Electronic Single Temperature Wall Mounted Tap



## Technical Specification

- Material: Stainless steel, plastic solenoid valve
- Inlet: 15mm Male (G 1/2" BSP)
- Outlet: Laminar flow
- Run time: 2 seconds (auto on / off)
- Working Pressures: 50kPa - 500kPa
- Rec. Working Pressure: 350kPa
- Max Working Temp: 50°C
- Valve: 6 Volts solenoid (15mm connection)
- Finish: Polished stainless steel

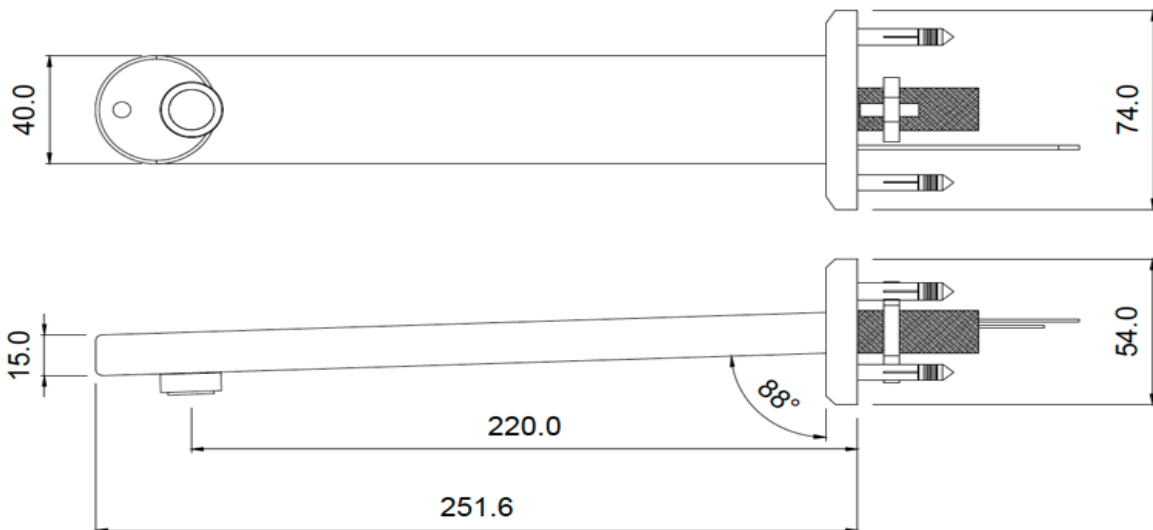

## Warranty

[Download the latest warranty statement](#)

## Features

WELS 6 Star 6L/min

Hygiene flush included to assist with infection control and reduce risk with Legionella growth

Angled Tap into the bowl to avoid waterpooling assists in better infection control.

Laser sensor technology stops nuisance triggering and activates on all colored skintones.

Run time, sensitivity and hygiene flush is programmable by remote control.

Supplied with inlet strainer and flow controller.

IP rated control box enclosure houses the solenoid valve and waterproof connections.