


GTTFT3500

Flostop Wall Mounted Single Temperature Timed
Flow Knee Operated Valve



Technical Specification

- Materials: Body - brass, wand - engineering plastic
- Cartridge: Timed flow (hydraulic)
- Cartridge Size: 15mm
- Inlet: 15mm Male (G 1/2" BSP)
- Outlet: 15mm Male (G 1/2" BSP)
- Run Time: 15 (+/- 2) seconds (fixed)
- Working Pressures: 150kPa-500kPa
- Rec. Working Pressures: 350kPa
- Working Temperatures: 5°C - 50°C
- Finish/Colour: Chrome plated

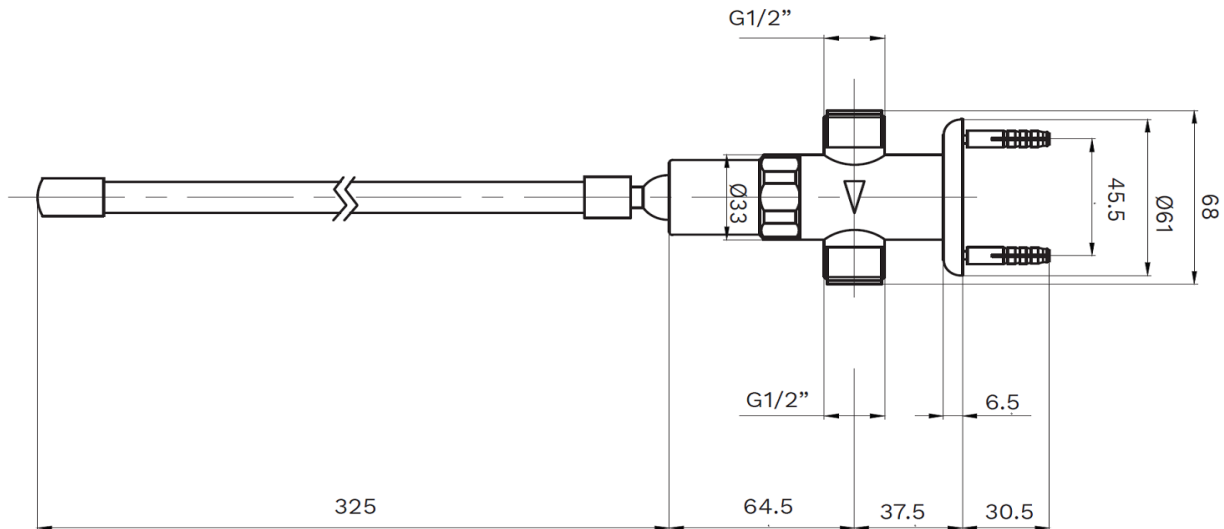

Warranty

[Download the latest warranty statement](#)

Features

- Run time: Up to 0-40 (+/-10) seconds available
- Soft-close, hydraulically operated time flow means that it's suitable for all markets
- Designed to be durable and anti-vandal
- Suitable for use in public areas
- One service kit used across the Flostop range for easy maintenance
- Supplied with inlet strainer
- Recommended for commercial and public projects
- Knee wand attachment