



# GTTFT4000

Flostop Timed Flow Single Temperature Shower Panel with Adjustable Shower Head



## Technical Specification

- Materials: Brass
- Cartridge: Timed flow (variable timed delay available)
- Run Time: 25-30 seconds
- Inlet: 15mm
- Outlet: Adjustable spray
- Working Pressures: 150kPa-500kPa
- Max Working Temp: 60°C
- Seat: Hydraulic
- Finish/Colour: Chrome plated
- WELS: 4 Star 6L/min

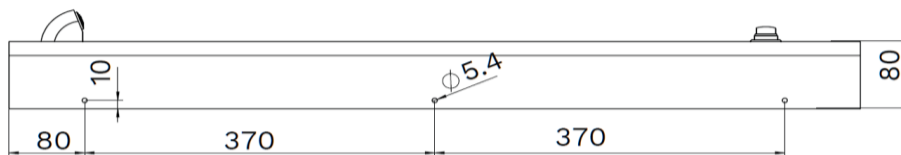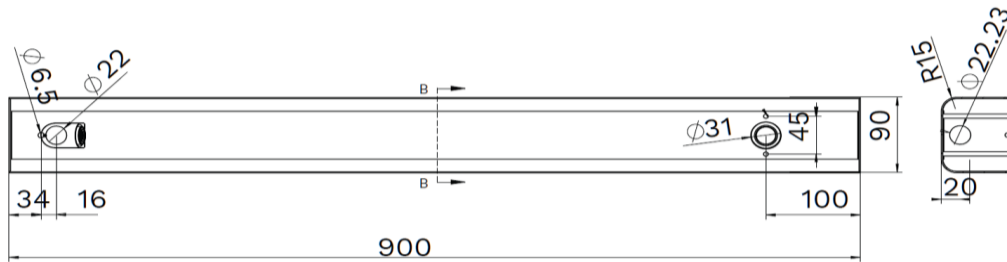

## Warranty

[Download the latest warranty statement](#)

## Features

- Soft close, hydraulically operated time flow suitable for all markets, including childcare
- Concealed aerator
- Three coloured button indicators supplied
- Designed for durability and to be anti-vandal so suitable for use in public areas
- One service kit used across the whole range
- Supplied with inlet strainer and flow controller
- Recommended for commercial and public projects.