


GTTFT7000W

Flostop Wall Mounted Single Temperature Timed
Flow Bib Tap



Technical Specification

- Materials: Brass
- Cartridge: Timed flow (hydraulic)
- Cartridge Size: 15mm
- Inlet: 15mm Female (G 1/2" BSP)
- Outlet: Aerated flow
- Run Time: 5 (+/-5) Seconds (adjustable)
- Working Pressures: 150kPa-500kPa
- Rec. Working Pressures: 350kPa
- Working Temperatures: 5°C - 50°C
- Finish/Colour: Chrome plated
- WELS: 6 Star 3.5L/min

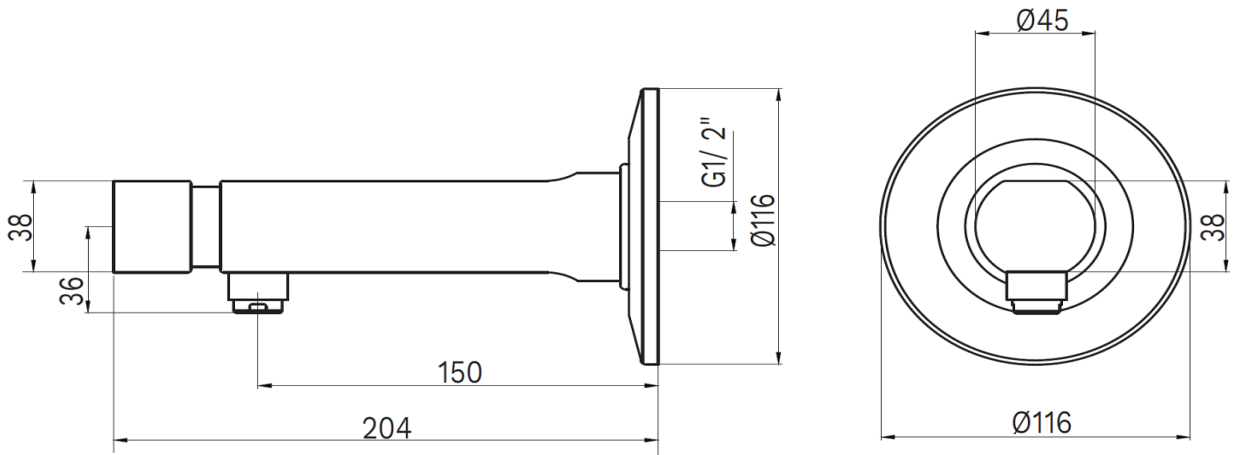

Warranty

[Download the latest warranty statement](#)

Features

- Run time: Up to 0-40 (+/-10) seconds available
- Soft-close, hydraulically operated time flow suitable for all markets, including childcare
- Concealed aerator
- Designed for durability and to be anti-vandal so suitable for use in public areas
- One service kit used across the whole range
- Supplied with inlet strainer
- Recommended for commercial and public projects.