


# TVI521319AU

Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators



## Technical Specification

- Temp Adjustment Range 30 - 50°C
- Temp Control +/- 3°C
- Max Op. Temp. 85 °C
- Operating Press. Range 20 - 500 kPa
- Max. Inlet Press. Differential 6:1
- Max Test Press. 1000 kPa
- Min. flow rate 4L/min
- Material DZR Brass
- Min. Operating Failsafe Temp. Differential 10°C
- AS 4032.2 Approval

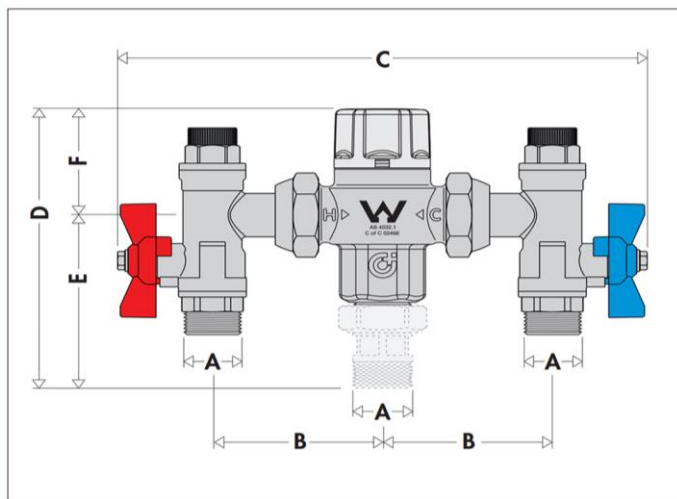

Code	TVI521319AU
A	3/4"
B	76
C	237,5
D	126,5
E	84
F	42,5

## Application

The Caleffi 5213 20mm Tempering Valve with Hot and Cold Check Valves and Isolators is used in plumbing systems to control water temperature and is installed mostly to feed a bathroom.

## Warranty

[Download the latest warranty statement](#)

## Features

- Australian Standards approved valve with 20mm 90° isolator unions
- Union connectors with o-ring seal with hot and cold check valves
- Temperature range adjustable 30 - 50°C
- Max. operating temperature 85°C
- Body in dezincification resistant brass