




HPRPD5 SUITABLE CONFIGURATIONS


SOLAR DIRECT

Use direct auxiliary ports

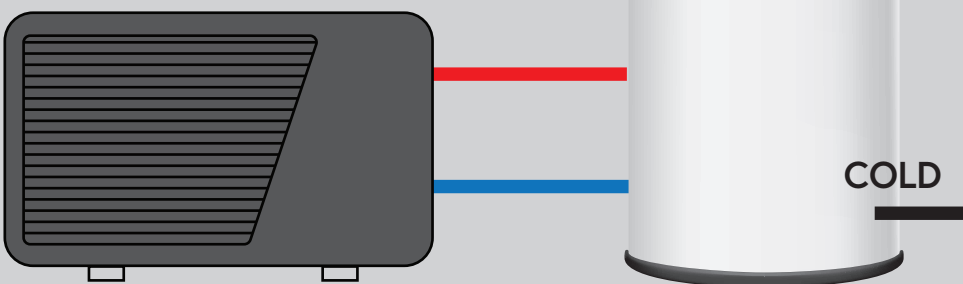

CONVENTIONAL/ PROTANK

Tee across cold & TPR valve port

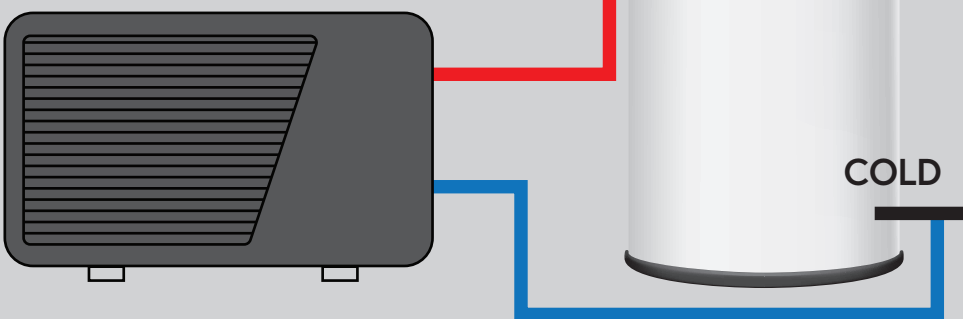


To ensure the Ritter hot water heat pump operates at peak efficiency, we are providing the correct configurations for connecting to hot water cylinders.

This quick guide helps to understand the optimal setup, ensuring seamless integration and reliable performance.


Getting it right the first time and delivering the best results for your customers!

WATERWARE

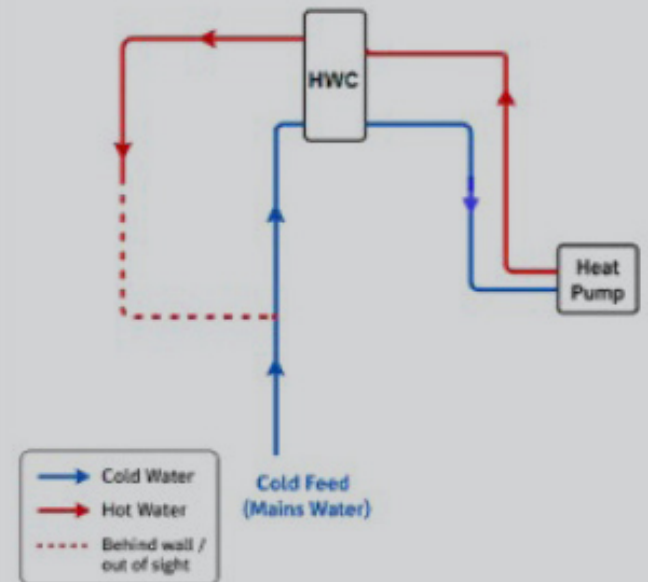

DUAL ENTRY CYLINDER WITH RECIRCULATION LOOP (RING MAIN) CONFIGURATION

Use spare cold port on opposite side

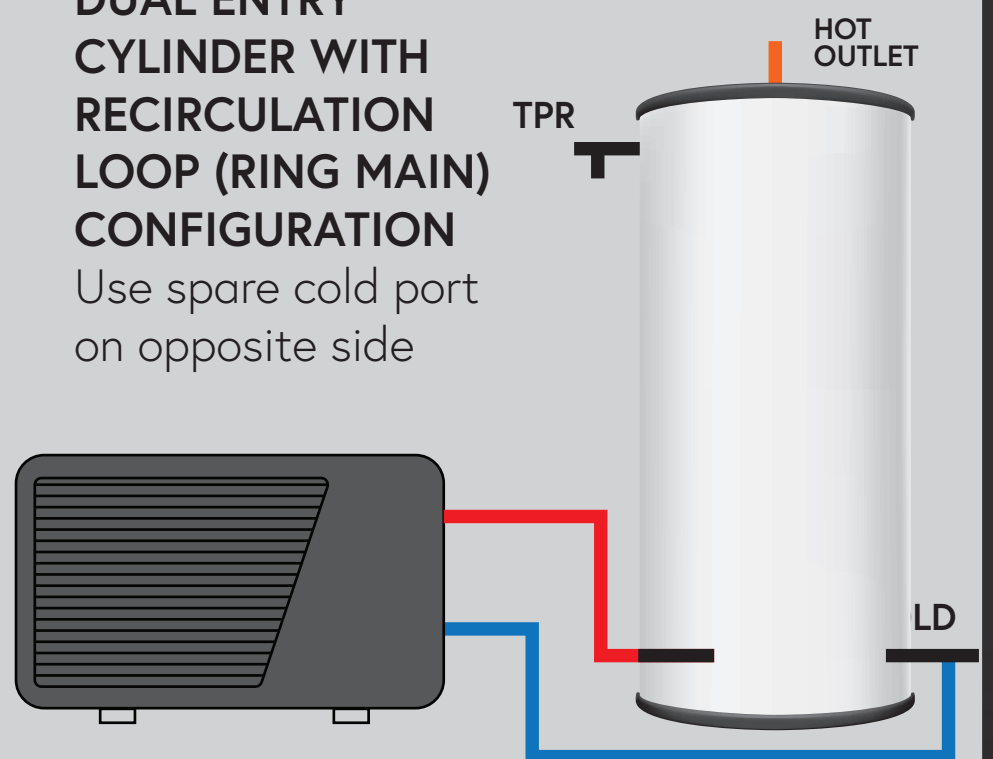

R290
ECO Friendly